



1.10 Dimensions

Load capacity ≤ 1000 kg, 1/1 reeving, with long suspension bracket

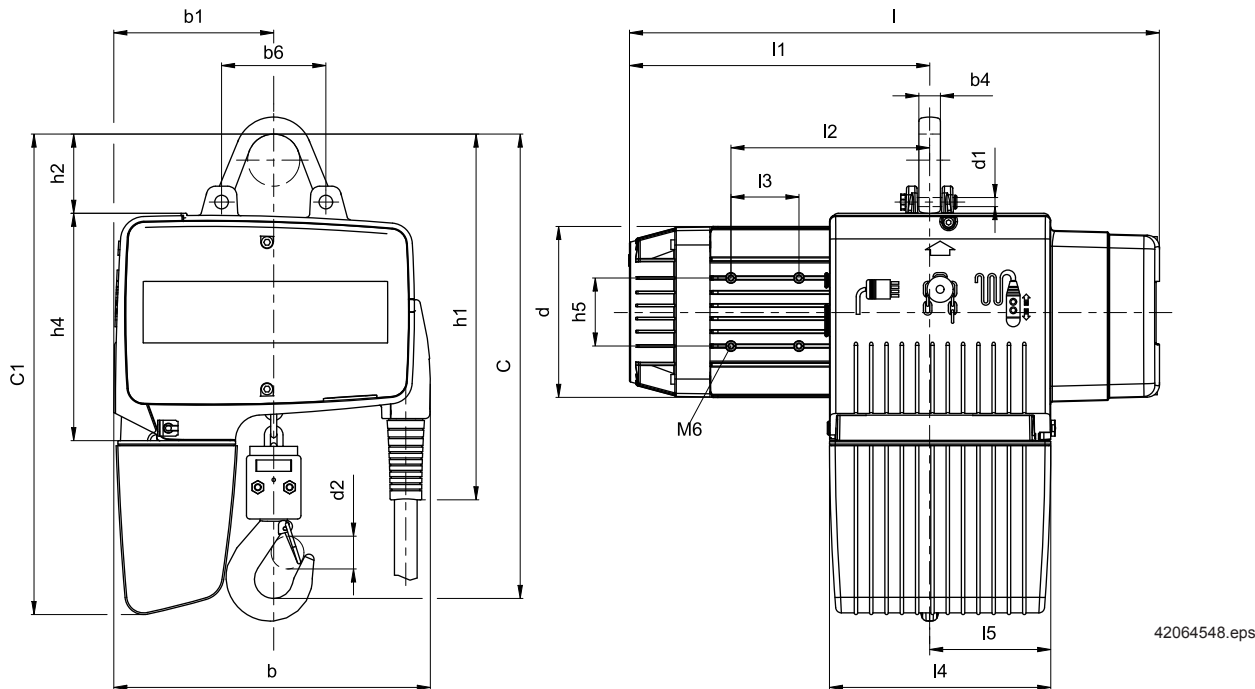

Load capacity ≤ 1000 kg, 1/1 reeving, with short suspension bracket (optional)


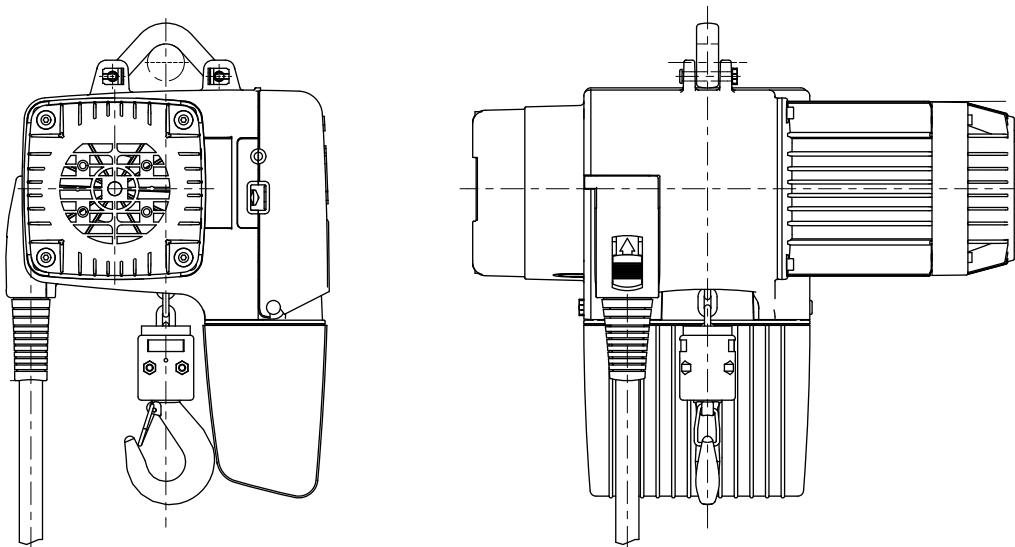


The following dimensions change due to larger cut-off springs for higher speeds:
1) H8 chain collector boxes are used for H5 hook paths and speed v2.


42064449.eps

Chain hoist size	Motor	Suspension bracket						b	b1	l	l1	l2	l3	l4	l5	b4	b6	d	d1	d2	Suspension bracket				h4	h5
		short	long	Chain collector box size																	h1	h2	h1	h2		
				H4	H5	H8	H8																			
		C	C 1 ¹⁾	h1	h2	h1	h2																			
DC-Com 1/2	ZNK 71 B 8/2	326	364	335	365	373	403	268	138	422	237	170	60	183	100	19	92	124	8	22	263	40	300	78	163	50
DC-Com 5	ZNK 80 A 8/2	378	416	395	425	435	465	280	141	468	265	175		195	107		151	24		293	323		201			
DC-Com 10	ZNK 100 A 8/2	472	505	493	582	526	615	349	184	528	289	183		227	135	23	124	187	18	33	350	65	383	98	233	


Load capacity > 1000 kg, 2/1 reeving, with long suspension bracket

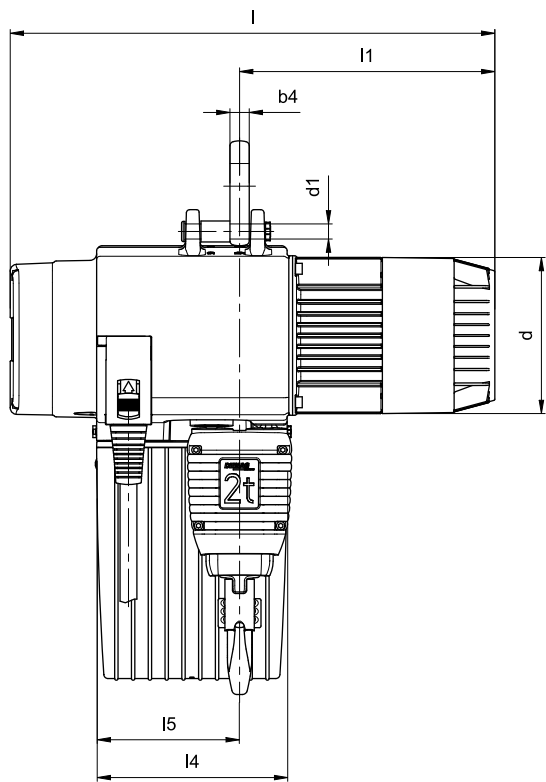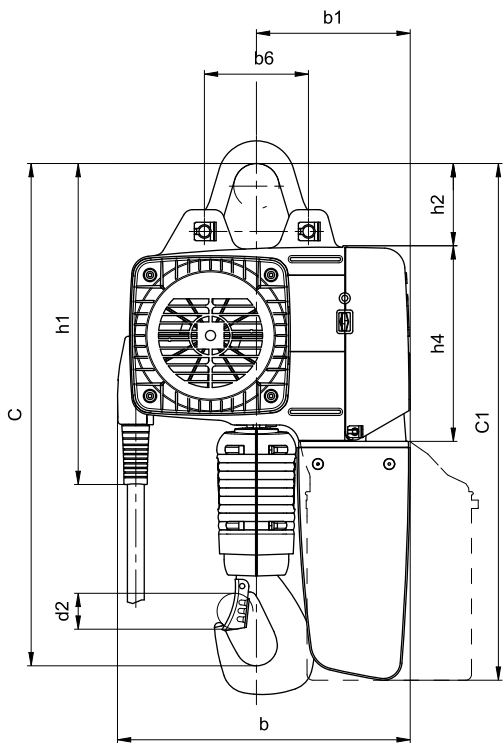

Bottom block with external cut-off springs, 2/1 reeving
Dimension C is increased by 60 mm when this bottom block is used.

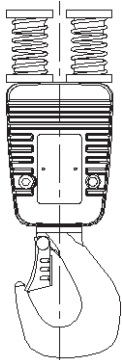

42666144.jpg

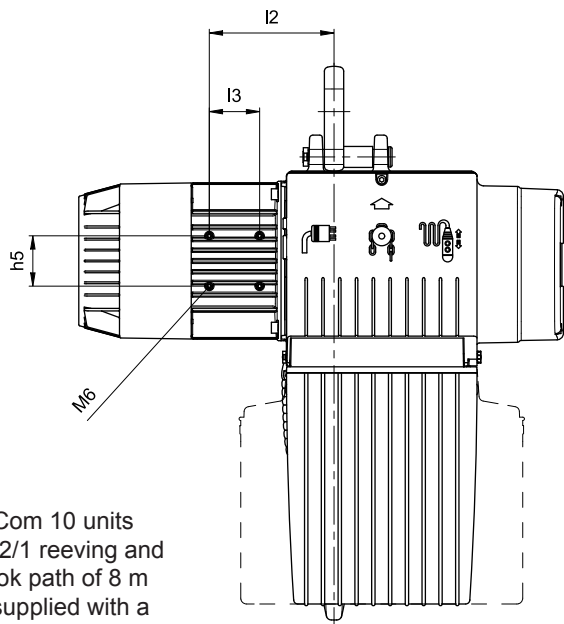

DC-Com 10 units with 2/1 reeving and a hook path of 8 m are supplied with a flexible chain collector bag (pay attention to dimensions).

42666051.eps

Size	Motor	Suspension bracket																				Suspension bracket										
		short	long	short	long																	short		long								
DC-Com 10	ZNK 100 B 8/2	Chain collector box size																I	I1	I2	I3	b4	b6	d	d1	d2					h4	h5
		H4 H5	H8	H4 H5	H8	H4 H5	H8	H4 H5	H8	H4 H5	H8	H4 H5	H8	H4 H5	H8																	
		C				C 1				b		b1		I4		I5																
		564	597	582	632	615	665	349	409	184	244	227	340	170	225	578	304										149	60	23	124		